

TECHNICAL DATA SHEET
SPECIAL LOCKERS

SAC SERIES

by  **MEGABLOK**



CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 1.5 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

Body and door in grey RAL 7035, micro-textured finish. Minimum thickness of the painting: 50 microns.

Three-point lock with two keys.

Recessed handle.


Door designed to accommodate laundry trolleys.

Reinforced hinge.

Opening in the upper part of the door for storing laundry.



COLOURS

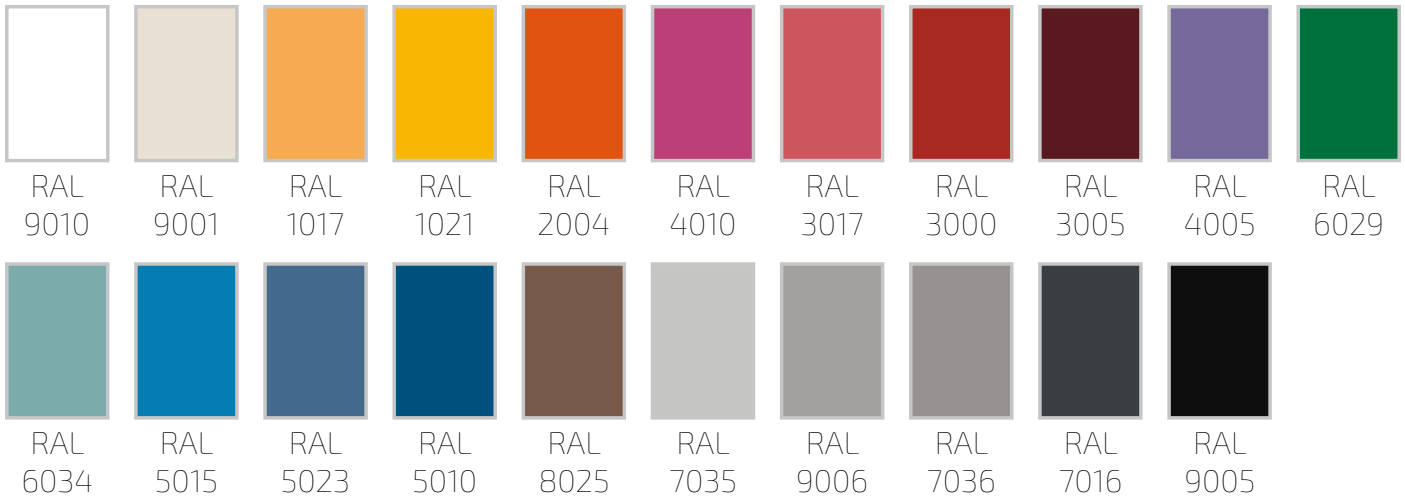

COMBINATIONS AND DIMENSIONS

