


TECHNICAL DATA SHEET

HPL LOCKERS WITH ALUMINIUM PROFILES

V, T, M, C, P, B, Z and L SERIES

by  **MEGABLOK**

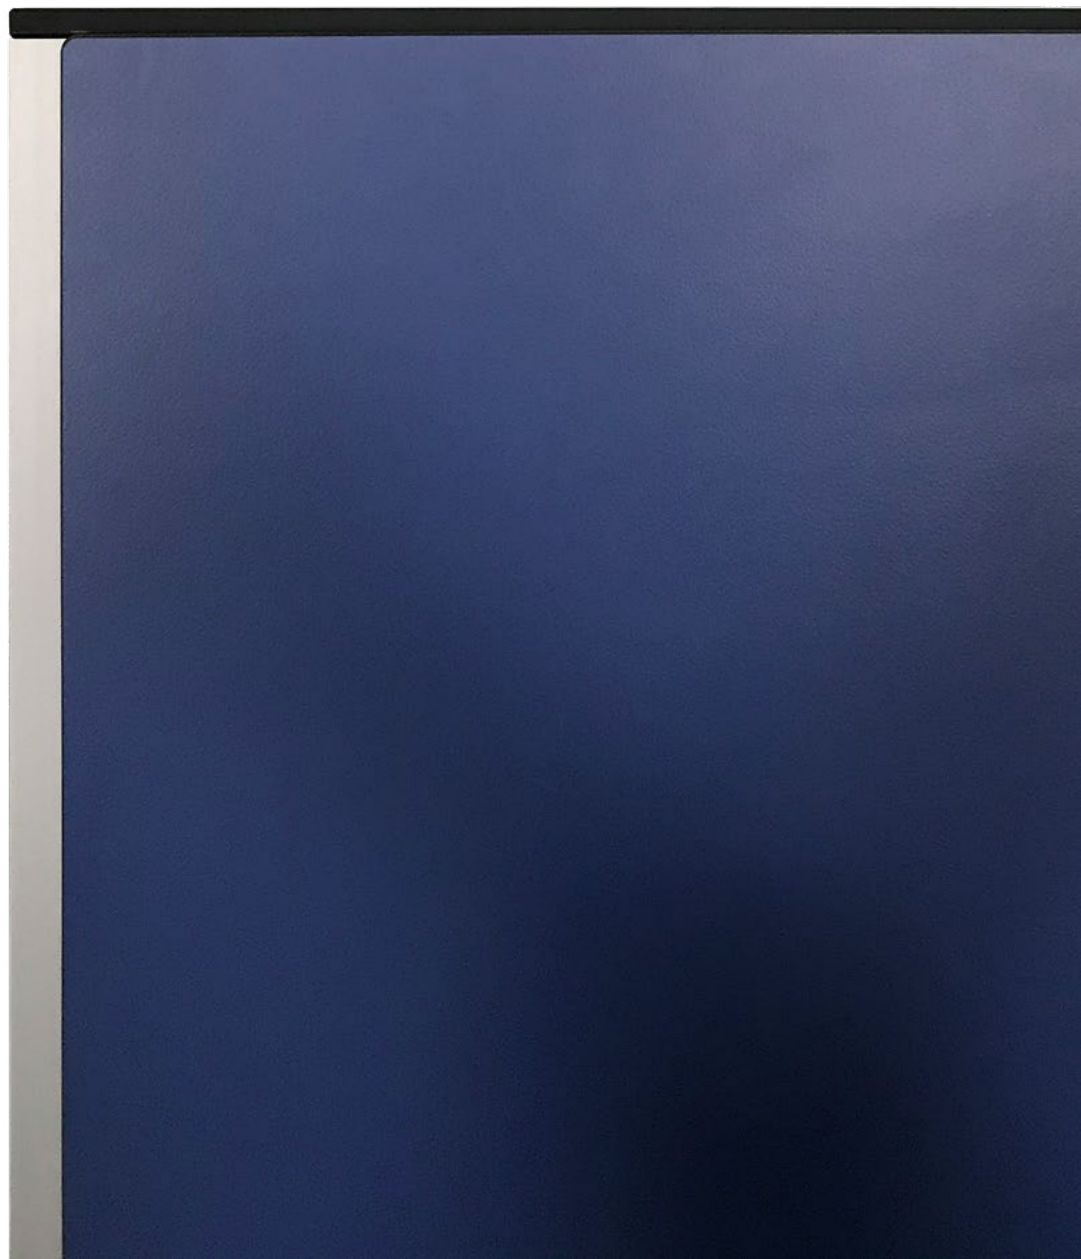



FVP SERIES
1 door per column



FTP SERIES
2 doors per column



FMP SERIES
3 doors per column



FCP SERIES
4 doors per column



FPP SERIES
5 doors per column



FBP SERIES
6 doors per column



FZP SERIES
8 doors per column



FLP SERIES
2 doors in L



CHARACTERISTICS

Made of HPL-panels of phenolic resins.

Rigid material, water-resistant, fire-resistant, antibacterial and adequate for wet areas.

Highly resistant against wear, that is why it is ideal for applications with a high index of use and frequent cleaning.

Core of black colour.

According to the european norms EN 438-1 and EN 438-2.

Density 1450 Kg/m³ according to DIN 53479.

Water-absorption of less than 3%.

4 mm thick board on the sides, 10 mm thick on the floor and ceiling and 12 mm thick on the doors.

4 mm thick board on the back sides plus aluminium stabilising profiles.

Rounded edges.

No maintenance required.

4 mm thick grooved phenolic back panel, fully framed.

Aluminium stabilising profiles.

Slide lock with removable cylinder and master key.

Adjustable 150 mm PVC legs.

Aluminium clothes rail with two hanging hooks in a.b.s. (Models FVP, FTP and FLP).

Upper tray (Model FVP).

A2 stainless steel screws.

Numbering plates included.

Easy cleaning


The nonporous surface repels dirt. Easy cleaning of the HPL, with normal chemical detergents, or with sanitizing products, against which the material is inalterable. In case of cleaning it from graffitis it can be used an organic dissolvent without risk of alteration of the colour.

Resistant against food residuals and colourants, as they do not affect neither the properties nor the appearance of the HPL (phenolic material). The Steel wool, or similar products, are not recommended, as they can scratch the surface and create cavities of corrosión, especially at the stainless Steel components. Take special care with the use of materials which contain chlorides, as they are contraindicated, as they can caus oxidation. Hydrochloric acid or iron products in prolonged contact, are also not recommended. Never use common Steel cleaners for stainless Steel!




COLOURS

Body



M-060


Doors



F-085



F-0074



F-0851



F-0010



F-0011



F-0232



F-0210



F-0725



F-6901



F-2478



F-0318



F-0718



F-0717




F-0193



F-0077




F-0080



FM-100



FM-200



FF-405

LOCKS



Standard: Key lock



Padlockable Polyamide Lock (optional padlock)



Padlockable Metallic Lock 1 (optional combination padlock)



Padlockable Metallic Lock 2 (optional combination padlock)



Metal handle



Coin-operated Lock (coin-return)



Coin-operated Lock + Coin Collect Box (cash box, non coin-return)



Lock of 4 manual digits with emergency key



Electronic lock combination of 4 digits NEXT 1



Electronic lock combination of 4 digits NEXT 2



Electronic lock combination of 4 digits SOLA



Electronic lock combination of 4 digits VERSA MINI



Electronic lock combination of 4 digits TELEC



Electronic lock combination of 4 digits ELOCK



Lock of proximity PROXI 2



Lock of proximity PROXI 3




Lock of proximity-VERSA MINI

OPTIONS



Mailbox Slot



Slope Top



HPL End Base



Decorative end panel



Bracelet of nylon



Elastic bracelet










Door opening limiter 90°.










COMBINATIONS AND DIMENSIONS

FVP SERIES

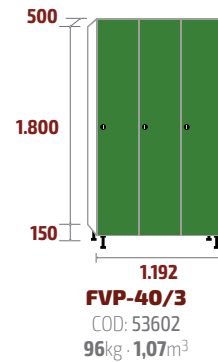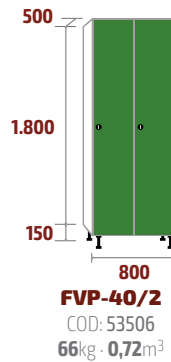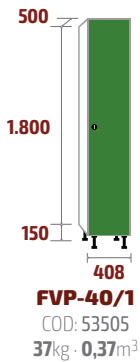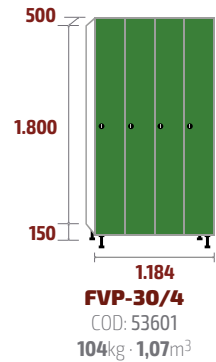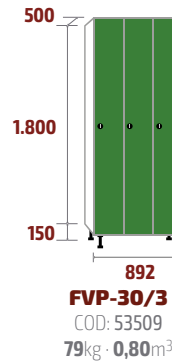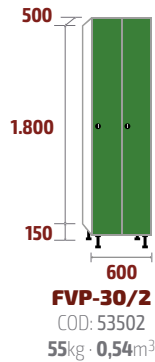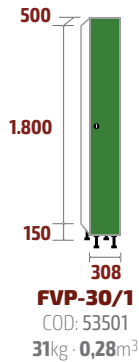

FTP SERIES

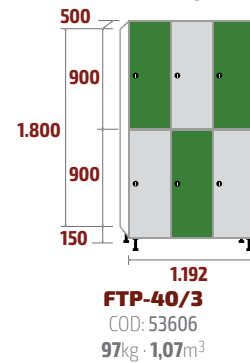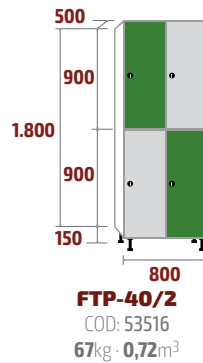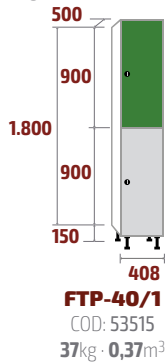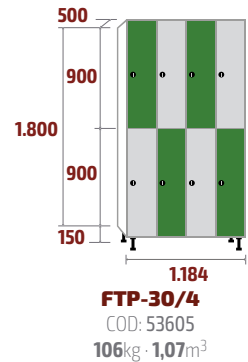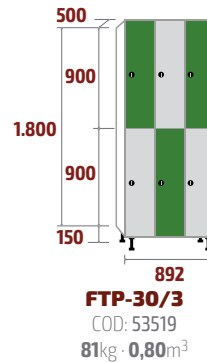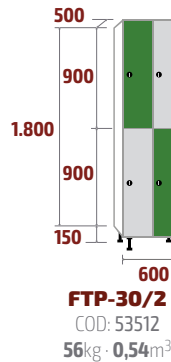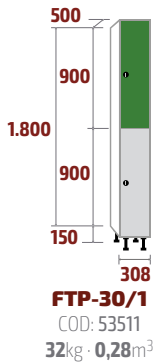


To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.

For further information, please, do not hesitate to contact us by phone +34 976 50 54 88, or to have a look at our homepage: www.megablok.com




COMBINATIONS AND DIMENSIONS


FMP SERIES

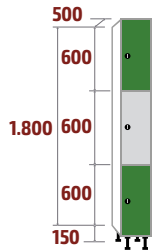


FMP-30/1
COD: 53531
34kg · 0,28m³

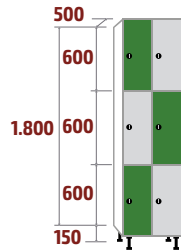


FMP-30/2
COD: 53532
62kg · 0,54m³

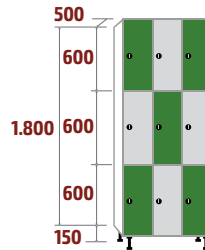


FMP-30/3
COD: 53539
89kg · 0,80m³

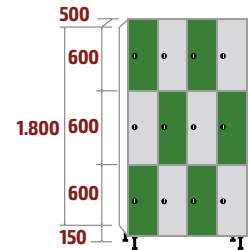


FMP-30/4
COD: 53609
116kg · 1,07m³

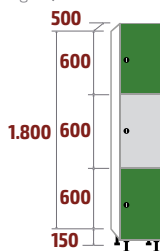

FMP-40/1
COD: 53535
40kg · 0,37m³

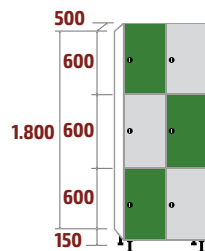


FMP-40/2
COD: 53536
74kg · 0,72m³




FMP-40/3
COD: 53610
108kg · 1,07m³


FCP SERIES




FCP-30/1
COD: 53521
37kg · 0,28m³




FCP-30/2
COD: 53522
67kg · 0,54m³




FCP-30/3
COD: 53529
97kg · 0,80m³




FCP-30/4
COD: 53613
127kg · 1,07m³

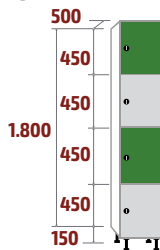

FCP-40/1
COD: 53525
44kg · 0,37m³

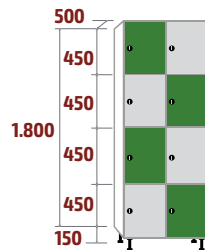

FCP-40/2
COD: 53526
81kg · 0,72m³




FCP-40/3
COD: 53614
118kg · 1,07m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.




COMBINATIONS AND DIMENSIONS


FPP SERIES

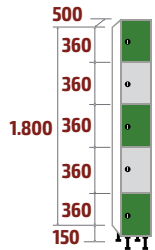


FPP-30/1
COD: 53551
40kg · 0,28m³

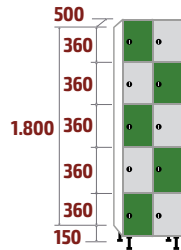


FPP-30/2
COD: 53552
73kg · 0,54m³

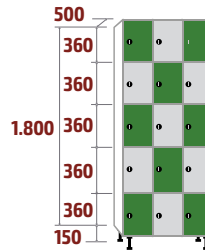


FPP-30/3
COD: 53559
105kg · 0,80m³

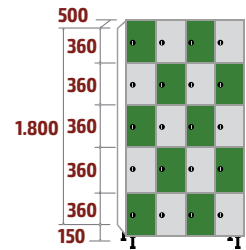


FPP-30/4
COD: 53617
138kg · 1,07m³

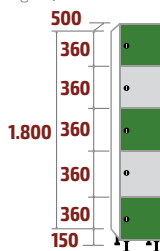

FPP-40/1
COD: 53565
47kg · 0,37m³

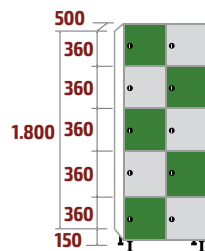


FPP-40/2
COD: 53566
88kg · 0,72m³




FPP-40/3
COD: 53618
128kg · 1,07m³


FBP SERIES




FBP-30/1
COD: 53561
42kg · 0,28m³




FBP-30/2
COD: 53562
78kg · 0,54m³




FBP-30/3
COD: 53569
113kg · 0,80m³




FBP-30/4
COD: 53621
149kg · 1,07m³

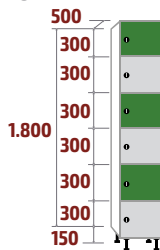

FBP-40/1
COD: 53575
51kg · 0,37m³

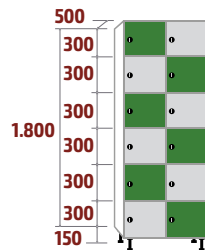

FBP-40/2
COD: 53576
94kg · 0,72m³

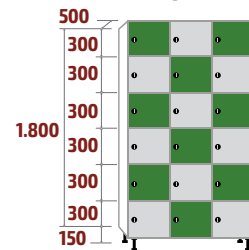

FBP-40/3
COD: 53622
139kg · 1,07m³


To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.

For further information, please, do not hesitate to contact us by phone +34 976 50 54 88, or to have a look at our homepage: www.megablok.com




COMBINATIONS AND DIMENSIONS


FZP SERIES

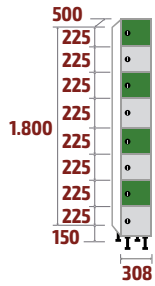


FZP-30/1
COD: 53581
48kg · 0,28m³

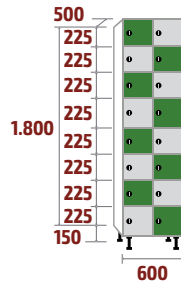


FZP-30/2
COD: 53582
89kg · 0,54m³

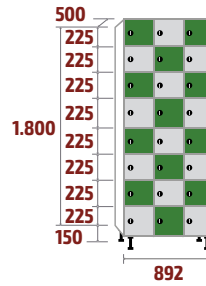


FZP-30/3
COD: 53589
129kg · 0,80m³

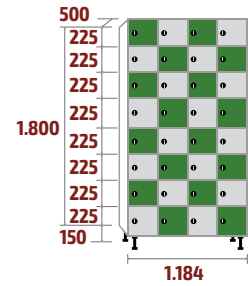


FZP-30/4
COD: 53625
170kg · 1,07m³

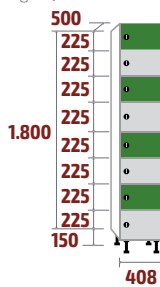

FZP-40/1
COD: 53585
57kg · 0,37m³

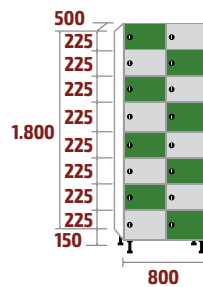


FZP-40/2
COD: 53586
108kg · 0,72m³

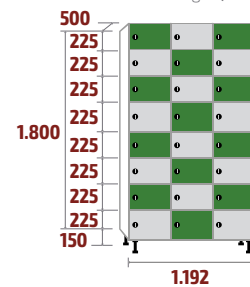


FZP-40/3
COD: 53626
159kg · 1,07m³


FLP SERIES




FLP-30/1
COD: 53541
38kg · 0,28m³

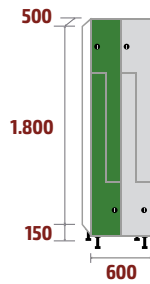


FLP-30/2
COD: 53542
70kg · 0,54m³

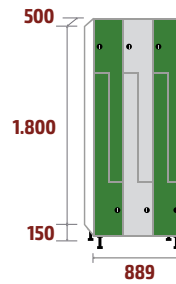


FLP-30/3
COD: 53549
101kg · 0,80m³

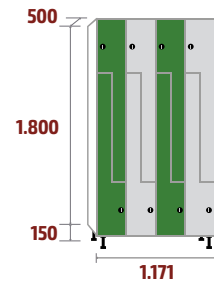


FLP-30/4
COD: 53629
132kg · 1,07m³

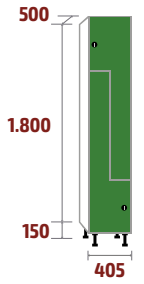

FLP-40/1
COD: 53545
44kg · 0,36m³

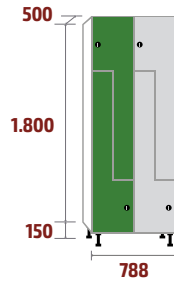

FLP-40/2
COD: 53546
80kg · 0,71m³

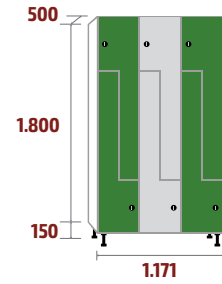

FLP-40/3
COD: 53630
117kg · 1,05m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.