


TECHNICAL DATA SHEET
LEFT-LUGGAGE LOCKERS
MONOBLOK METHACRYLATE SERIES
by  **MEGABLOK**





CHARACTERISTICS

Welded Monoblok locker boxes, manufactured with cold laminated sheet metal DC01, according to the European Norm EN 10130, with a carbon content of less than 0,12%.

Metal thickness of 0.8mm.

Point welding process.

Previous treatment of passivating and degreasing.

Dried in a polymerization oven at 180°C during 15 minutes.

Painting with Epoxy-polyester powder in robotized cabins.

Body and doors painted in grey RAL 7035 Micro-textured finish. Minimum thickness of the painting: 50 microns.

Socle included (front + back + sides).


Transparent 10 mm thick methacrylate door.

Coin lock (coin returnable).

Height-adjustable door stops.



COLOURS

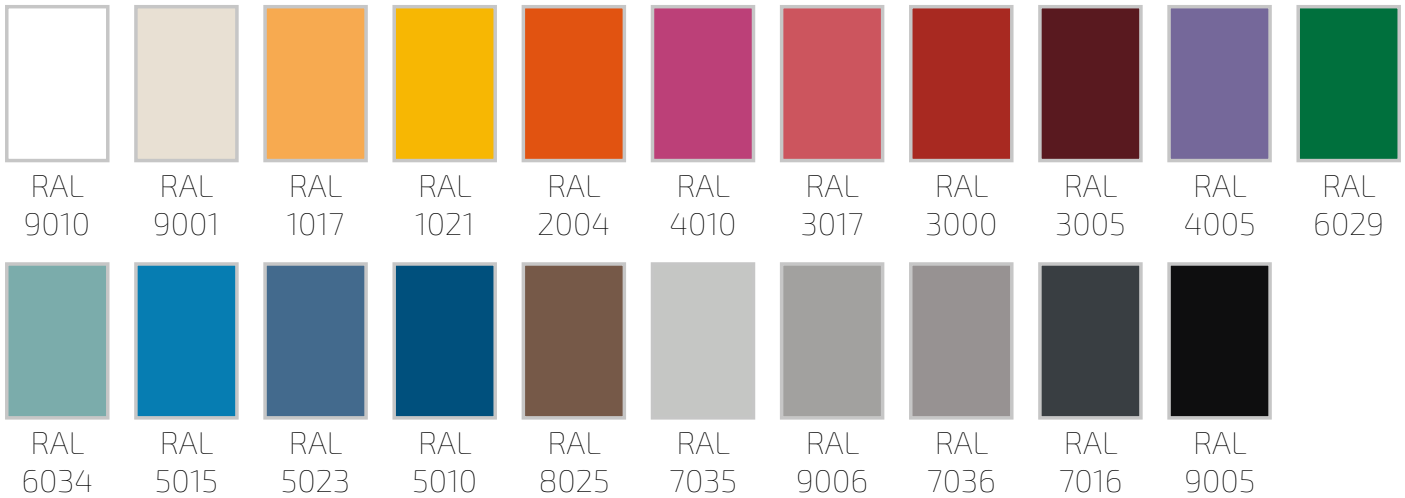


LOCKS







COMBINATIONS AND DIMENSIONS




CM2P1200-S
COD: 42802
22kg · 0,19m³




CM2P1200-D
COD: 42812
44kg · 0,38m³




CM3P1200-S
COD: 42803
24kg · 0,19m³




CM3P1200-D
COD: 42813
48kg · 0,38m³

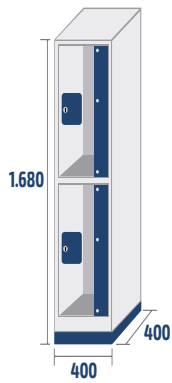


CM2P1600-S
COD: 42902
25kg · 0,26m³

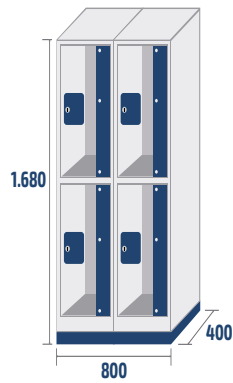


CM2P1600-D
COD: 42903
50kg · 0,51m³

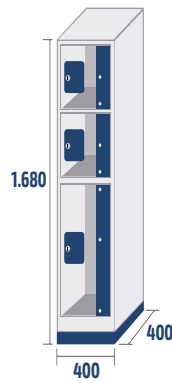


CM3P1600-S
COD: 42904
26kg · 0,26m³

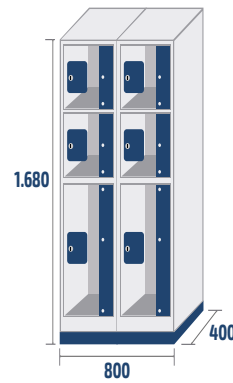

CM3P1600-D
COD: 42912
53kg · 0,51m³

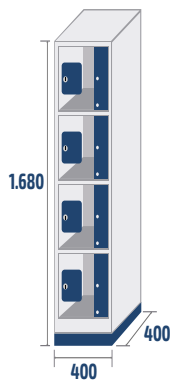

CM4P1600-S
COD: 42913
28kg · 0,26m³

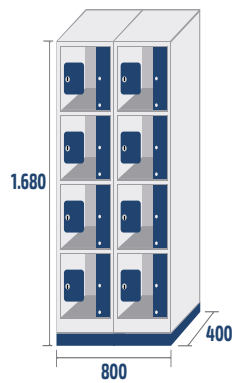

CM4P1600-D
COD: 42914
55kg · 0,51m³



COMBINATIONS AND DIMENSIONS

INTERIOR MEASUREMENTS (mm)

MODEL	400			
	HEIGHT 1	HEIGHT 2	WIDTH	DEPTH
CM2P1200-S	720	348	344	379
CM2P1600-S		720	344	379
CM4P1600-S		348	344	379
CM3P1200-S		348	344	379
CM3P1600-S	720	348	344	379